


cardo

SHO-1™

QUICK GUIDE

This Quick Guide is not a substitute to the user manual and addresses only a limited scope of features and functions of your **cardo SHO-1**. Use it to look up basic functions and commands while you are on the road without the user manual.

This Quick Guide can be printed and folded for easy reference while on the road, or it may be viewed directly on your smartphone or tablet.

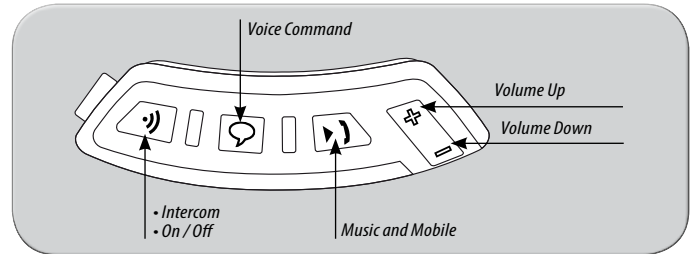

1 GENERAL FUNCTIONS	
Power ON / OFF	Press for 2 seconds • ON: 3 BLUE flashes + ascending tone • OFF: 3 RED flashes + descending tone
Volume	Tap or to adjust and set volume of current audio source
Mute / Unmute	Tap and simultaneously
Battery level indicator	In Standby, press and for 5 seconds • Blue LED = Full charge • Purple LED = Half charge • Red LED = Almost empty
Hear Your Buddy Name	In Standby, tap and simultaneously
Paired Device Indication	In Standby, press and for 2 seconds If "One+8" Buddies are within range, purple LEDs flash for 2 seconds
Play Paired Buddy List	In Standby, press for 2 seconds
Group Signal	Tap twice
Enable / Disable VOX (For Intercom calls only)	In Standby, press and for 2 seconds • Enabled: Blue flash for 2 seconds • Disabled: Red flash for 2 seconds
Enable / Disable Spoken Status Announcements	Press and for 2 seconds

2 | VOICE COMMANDS

- In Standby, tap or speak any word loudly to activate VOX
- Speak a Voice Command from the table below:

Current Mode	Desired Action	Say this:
Standby / FM / A2DP / AUX	"One+8" Intercom Call	<<Buddy Name>>
	Intercom call with A or B	"Call Intercom"
Standby	Start A2DP	"Music ON"
	Turn on FM	"Radio ON"
FM Radio	Turn off FM	"Radio OFF"
	Next Station Preset	"Next Station"
	Previous Station Preset	"Previous Station"
A2DP Music	Next track	"Next track"
	Previous track	"Previous track"
	Stop / Pause A2DP	"Music OFF"

3 SETTINGS MENU	
Enter Settings Menu	In Standby, press for 2 seconds and follow the spoken instructions
Exit Settings Menu	Press for 2 seconds

4 MAIN UNIT LED INDICATION	
None	cardo SHO-1 is OFF
1 BLUE flash every 3 seconds	Standby mode – No active audio
2 BLUE flashes every 3 seconds	Active mode – Call in progress / music or other audio source is ON
1 RED flash every 3 seconds	Standby mode – Battery is low
2 RED flashes every 3 seconds	Active mode – Battery is low
Solid PURPLE	USB connected
Solid RED (battery LED)	Charging

5 VOICE CONNECT (VOX)	
VOX Sensitivity (Default: Medium)	Adjust via the Settings Menu, the App or the <i>Cardo Community</i> . High: Use this setting if it is difficult to activate VOX Low: Use this setting if it is too easy to activate VOX
VOX Operation Mode	VOX can be set to activate the Voice Command (default) or to start an Intercom Call via the <i>Cardo Community</i> or the App

6 PAIRING BLUETOOTH DEVICES: MOBILE PHONE/GPS/A2DP MUSIC PLAYER	
Bluetooth Channel 1 pairing mode	In Standby, press for 5 seconds
Bluetooth Channel 2 pairing mode	In Standby, press for 5 seconds
To pair a GPS, when LEDs begin rapidly alternating, tap .	

7 PHONE CALLS	
Answer a call	Tap or speak any word loudly to answer by VOX
Reject a call	Remain silent for 15 seconds, or press for 2 seconds
End a call	Tap
Voice Dial* (if supported by mobile phone)	Press for 2 seconds and follow the prompt from the mobile
Redial*	Press for 2 seconds
Hot Dial**	Tap three times
Set default mobile***	While on a phone call, press for 5 seconds
Change default mobile	In Standby, press for 5 seconds
INTERCOM CONFERENCE MODE	
Add/Remove Channel "A" to/from a call	Tap while on a phone call
Add/Remove Channel "B" to/from a call	Double-tap while on a phone call

*This feature is not available during intercom or mobile calls.

** Before using Hot-Dial, configure the number via the *Cardo Community*.

*** If 2 mobile phones are paired directly to your cardo SHO-1, set one to use as default for outgoing calls.

8 A2DP MUSIC AND FM RADIO	
Turn on A2DP Music	In standby, tap
Turn on Radio	In standby, double-tap
Pause / Stop Audio	Press for 2 seconds
Next Track / Station	With music ON, tap
Previous Track / Station*	With music ON, double-tap
RDS On/Off (Default: Off)	With Radio ON, press and simultaneously for 2 seconds
Music Sharing (via A2DP only)	
[SENDER] Start/Stop sharing your music	During A2DP music playback, press for 2 seconds
[RECEIVER] Stop music sharing	Press for 2 seconds

*With some phones you may need to repeat this action

9 | INTERCOM


Note: *cardo SHO-1 DUO* units are already factory paired!

Pairing	
Pairing with a "One+8" Intercom Buddy	<ul style="list-style-type: none"> Pair via the <i>Cardo Community</i> or In Standby, press for 5 secs. Purple LED = success
Pairing Intercom Channel A	In Standby, press for 5 seconds. Channel "A" pairs automatically – Rapid RED flashing.
Pairing Intercom Channel B	In Standby, press for 5 seconds. When LED begins flashing, tap twice – Rapid BLUE flashing
3-Way Intercom	<ul style="list-style-type: none"> Rider 1 and Rider 2 pair via "A" Rider 1 and Rider 3 pair via "B"
4-Way Intercom	<ul style="list-style-type: none"> Rider 1 and Passenger 2 pair via "A". Rider 3 and Passenger 4 pair via "A" Passenger 2 and Passenger 4 pair via "B"


Calling "One+8" Intercom Buddies		
Voice Connect (VOX)	OR	
a. Speak any word loudly into the microphone or tap b. When you hear the Voice Command tone, say the name of the "One+8" Intercom Buddy		
		Manual Mode
		a. Press for 2 seconds b. Hear the names of all paired Buddies. c. Tap or speak any word loudly into the microphone when you hear the name. To cancel "One+8" Buddy List playback: Press for 2 seconds.

Calling Intercom Channels "A" and "B" (Two and Three-Way Calls)		
Voice Connect (VOX)	OR	
Speak any word loudly into the microphone. When you hear the Voice Command tone, say "Call Intercom" to start an intercom call with "A" and/or "B" (subject to who is present) VOX Intercom call with only "A" or "B" will end automatically after 30 seconds of silence.		
		Manual Mode
		Use this to start an Intercom call with: <ul style="list-style-type: none"> Channel "A": Tap Channel "B": Double-tap To end a call tap . If you are already in an Intercom call with "A" or "B", you can add another rider ("A" or "B") by tapping or another rider can join the intercom call in the same way.

Three-Way Calls



Four-Way Calls

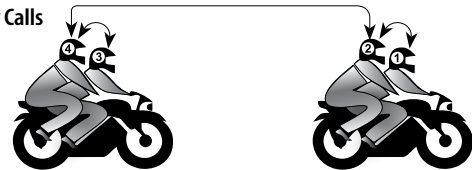

Calling

1. Make sure all four units are in Standby.
2. Passenger 2 should double-tap to call Passenger 4. Wait until audio is heard on both units.
3. Rider 1 should tap to call Passenger 2.
4. Rider 3 should tap to call Passenger 4.

10 | CLICK TO LINK ("CTL") CALLS

Start a CTL call request (search lasts up to 10 sec.)	Tap three times
End a CTL call / Cancel a CTL call request	Tap
Accept a CTL call	When hearing the CTL ringtone: Tap or say any word loudly to answer by VOX
Reject a CTL call	While hearing the CTL ringtone: Remain silent until the ring tone stops or press for 2 seconds
Enable / Disable CTL (Enabled by default)	Via the Settings Menu, the App or <i>Cardo Community</i>

11 | TROUBLESHOOTING

Reboot	If your cardo SHO-1 stops responding, reset it by turning it off and then on again (press for 2 seconds).
Reset Pairing (Deletes all paired devices)	<ol style="list-style-type: none"> 1. In Standby, press for 5 secs until LED flashes RED/BLUE. 2. Press for 2 seconds until LED flashes 5 times in PURPLE.

The contents of this User Guide, including all text, illustrations and drawings are the exclusive intellectual property of Cardo Systems, Inc. (the "Company") and are protected by copyright laws. Any partial or total reproduction, translation and/or dissemination, without the prior written authorization by the Company are strictly prohibited. Any rights not expressly granted herein are reserved.