



## 2-3 Battery installation instructions

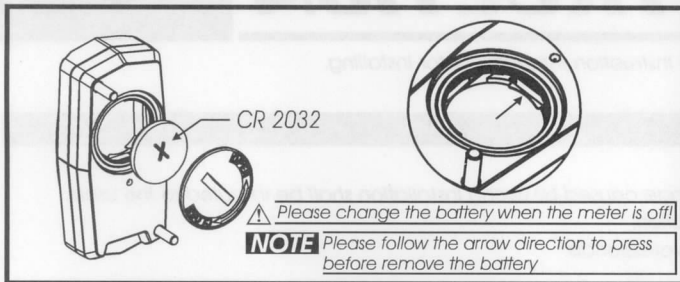


## 2-4 New ignition syste



For the models comes with the new Ignition coil, please wrap the RPM wire st least 5 times around the spark plug as the above drawing.

## 3 Instruction of function

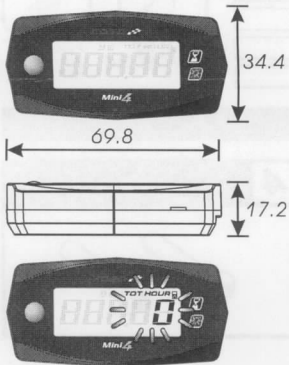

● Total hour meter

Display range : 0~99999 H

Display unit : 1 H

● hour meter A/B

Display range : 0.0~999.9 H

Display unit : 0.1 H

● Supply voltage

DC 12V

● Battery type

CR 2032

● battery life time

About 350 H (when battery volume below 250 mAh)

● Effective temperature range

-10~60°C

● Meter standard

JIS D 0203

● Meter size

W69.8 X L34.4 X H17.2 mm

● Meter weight

About 47.6g

**NOTE** Design and specifications are subject to change without notice!

EX.

## 4 Hour meter A, B & reset



● In main screen, **press the button one time** to enter the hour meter A.

● EX. Now the total hour is 168 H.

● In hour meter A screen, **press the button one time** to enter the hour meter B.

● EX. Now the hour meter A display 168.8 H

● In hour meter B screen, **hold down the button for 3 seconds** to reset the record.

● EX. Now the hour meter B displays 88.8 H.

● In hour meter B screen, **Press the button one time** to back to the main screen.

● Back to the main screen.

**NOTE** The meter will turn off automatically if you don't press the button or there is no signal input for seconds.

## 5 Trouble shooting

The following situation do not indicate malfunction of the meter. Please check the following before taking it in for repair.

Trouble	Check item
The meter doesn't work when the power is on.	<ul style="list-style-type: none"> <li>● Maybe the problem is caused by the insufficient power → Please change the inner battery. (CR 2032.)</li> <li>● Maybe the problem is caused by wrong battery installation → Please check is the battery direction is correct.</li> <li>● Please check the RPM sensor wiring is connected correctly.</li> </ul>

※ If still can't solve the problems according to the steps above, please contact with distributors or us.